
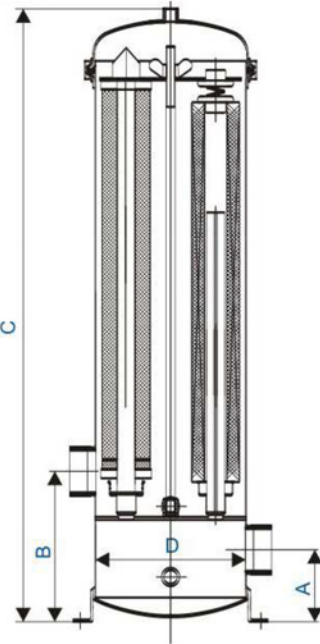


Filter Housing

Multi-cartridge Stainless Steel Filter Housings



Standard 40" string wound cartridges

Features & Benefits:

- High quality stainless steel SUS304, SUS316L, or PVC Material
- Convenient clamp closures for easy cartridge replacement
- Multi-cartridge housings are ideal for a wide range of applications
- Pipe fittings, drains and vents are readily accessible for easy installation
- Maximum operating pressure 100 psi / 6 bar
- Models come with mounting tabs
- Housings are designed to accept standard DOE cartridges
- Available in polished or sandblast external surface

Specifications:

Model	No. of Cartridges	Cartridges Length	Inlet & Outet	Drain	Vent
W5L4	5	40"	1.5"	1/4" FNPT	1/4" FNPT
W7L4	7	40"	2"	1/2" FNPT	1/4" FNPT

Model	A	B	C	D	E	F
W5L4	120 mm	220 mm	1360 mm	200 mm	248 mm	260 mm
W7L4	120 mm	220 mm	1370 mm	250 mm	310 mm	310 mm

Multi cartridge housings of various sizes, closures and lengths are available on request.